

Technical documentation

Last changed on: 2024-09-04

CPS mini series

Built-in Compact High Voltage Module

- Versions from 1 kV – 6 kV
- patented resonance converter technology
- INHIBIT
- low ripple and noise, low EMI
- hardware limits for voltage and current



Document history

Version	Date	Major changes
1.2	2024-09-04	Editing the safety instructions, added soldering and case temperature, Overview revised, added Voltage and current monitor accuracy, Options and order information revised
1.1	2022-11-21	Increase of the current (I_{in}), The module name includes only voltage and current, rename the document
1.0	2021-09-30	Documentation separation of the modules CPS mini series, fixed dimensions

Disclaimer / Copyright

Copyright © 2024 by iseg Spezialelektronik GmbH / Germany. All Rights Reserved.

This document is under copyright of iseg Spezialelektronik GmbH, Germany. It is forbidden to copy, extract parts, duplicate for any kind of publication without a written permission of iseg Spezialelektronik GmbH. This information has been prepared for assisting operation and maintenance personnel to enable efficient use.

The information in this manual is subject to change without notice. We take no responsibility for any mistake in the document. We reserve the right to make changes in the product design without reservation and without notification to the users. We decline all responsibility for damages and injuries caused by an improper use of the device.

Safety


This section contains important security information for the installation and operation of the device. Failure to follow safety instructions and warnings can result in serious injury or death and property damage.

Safety and operating instructions must be read carefully before starting any operation.

We decline all responsibility for damages and injuries caused which may arise from improper use of our equipment.

Depiction of the safety instructions

DANGER



“Danger” indicates a severe injury hazard. The non-observance of safety instructions marked as “Danger” will lead to possible injury or death.

WARNING



“Warning” indicates an injury hazard. The non-observance of safety instructions marked as “Warning” could lead to possible injury or death.

CAUTION



Advises marked as “Caution” describe actions to avoid possible damages to property.

INFORMATION



Advises marked as “Information” give important information.



Read the manual.



Important information.



Attention high voltage!

Intended Use

The device may only be operated within the limits specified in the data sheet. The permissible ambient conditions (temperature, humidity) must be observed. The device is designed exclusively for the generation of high voltage as specified in the data sheet. Any other use not specified by the manufacturer is not intended. The manufacturer is not liable for any damage resulting from improper use.

Qualification of personnel

A qualified person is someone who is able to assess the work assigned to him, recognize possible dangers and take suitable safety measures on the basis of his technical training, his knowledge and experience as well as his knowledge of the relevant regulations.

General safety instructions

- Observe the valid regulations for accident prevention and environmental protection.
- Observe the safety regulations of the country in which the product is used.
- Observe the technical data and environmental conditions specified in the product documentation.
- You may only put the product into operation after it has been established that the high-voltage device complies with the country-specific regulations, safety regulations and standards of the application.
- The high-voltage power supply unit may only be installed by qualified personnel.

Important safety instructions

WARNING



To avoid injury of users it is not allowed to open the unit. There are no parts which can be maintained by users inside of the unit. Opening the unit will void the warranty.

WARNING



Do not operate the unit in wet or damp conditions.

WARNING



Do not operate the unit in an explosive atmosphere.

WARNING



Do not operate the unit if you suspect the unit or the connected equipment to be damaged.

INFORMATION



It is strongly recommended to read the manual before operation!

Table of Contents

Document history	2
Disclaimer / Copyright	2
Safety	3
Depiction of the safety instructions	3
Intended Use	4
Qualification of personnel	4
General safety instructions	4
Important safety instructions	5
1. General description	7
2. Overview	7
3. Technical Data	8
3.1. Specifications	8
3.2. Configurations	9
3.3. Options	9
3.4. Functional description	10
4. Dimensional drawings	11
5. Connectors and PIN assignments	12
6. Order guides	13
7. Appendix	13
8. Glossary	14
9. Warranty & Service	15
10. Disposal	15
11. Manufacturer contact	15

1. General description

CPS mini modules are highly stable analog controlled High Voltage Power supplies. Modules of the CPS series can be used as standalone DC/DC converters. The output voltage is controllable with an analog interface with either a potentiometer (internal reference voltage) or an input analog control voltage. The modules are equipped with INHIBIT, current and voltage limits.

Customized versions can be produced on request.

2. Overview



Figure 1: TOP view



Figure 2: Bottom view

Number		Description	Detailed explanation in chapter
[1]	Top View	Type plate	6 Order guides
[2]	Connection pins	PIN 1 to 9	Table 5: PIN Assignment, 5 Connectors and PIN assignments, 4 Dimensional drawings
[3]	Connection pins	PIN 10 and 11	Table 5: PIN Assignment, 5 Connectors and PIN assignments, 4 Dimensional drawings

Table 1: Overview

3. Technical Data

3.1. Specifications

SPECIFICATIONS	CPS mini
Out voltage V_{nom}	1 – 6 kV
Polarity	Factory fixed, positive or negative
Ripple and noise ($f > 10$ Hz) ⁽¹⁾	$< 2.5 \cdot 10^{-6} \cdot V_{nom}$
Stability - $[\Delta V_{out} \text{ vs. } \Delta V_{in}]$ ⁽¹⁾	$< 5 \cdot 10^{-5} \cdot V_{nom}$
Stability - $[\Delta V_{out} \text{ vs. } \Delta R_{load}]$ ⁽¹⁾	$< 2 \cdot 10^{-4} \cdot V_{nom}$
Temperatur coefficient	50 ppm / K
Supply voltage V_{in}	22.8 – 25.2V
Supply current I_{in} at $V_{out} = 0$ at $V_{out} = V_{nom}$ / with load	< 25 mA < 0.5 A
Set / Monitor voltage	0 – 5 V
Adjustment accuracy ⁽²⁾	1 %
Voltage monitor accuracy ⁽²⁾	1 % $\cdot V_{nom}$
Current monitor accuracy ⁽²⁾	1 % $\cdot I_{nom}$
Voltage ramp up/down	$0.25 \cdot V_{nom} / s$
Protection	Overload and short circuit protected (ATTENTION: there is only one short circuit or arc per second allowed!) V_{limit}/I_{limit} : Output voltage and current internally limited to approx $1.1 \cdot V_{nom}$ resp. I_{nom}
System / Remote connector	Pin
HV connector	Pin
Maximum soldering temperature	1.5mm from case for 10 sec, 270 °C
Maximum case temperature	120 °C
Case	metal box moulded
Dimensions – L/W/H	120 / 40 / 25 mm ³
Operating temperature	0 – 40 °C
Storage temperature	-20 – 60 °C
Humidity	max. 70 %, not condensing
Notes: 1) – Specifications for stability, ripple and noise are guaranteed in the range $2\% \cdot V_{nom} < V_{out} \leq V_{nom}$; $I_{set} \geq 1\% I_{nom}$ 2) – Temperature coefficient and accuracy are guaranteed in the temperature range 0 – 40 °C	

Table 2: Technical data: Specifications

3.2. Configurations

CONFIGURATIONS								
	V_{nom}	I_{nom}	Standard Ripple mV_{p-p}	Internal Capacitance nominal C_F / nF	Damping Resistor $R_{DMP} / k\Omega$	Discharge Resistor $R_{DIS} / M\Omega$	HV connector	Item Code
CPx 10 805	1 kV	8 mA	3	110	0.22	55	PIN	CM010805x2450ooo98rk
CPx 20 405	2 kV	4 mA	5	45	1	55	PIN	CM020405x2450ooo98rk
CPx 30 255	3 kV	2.5 mA	8	33	1.5	55	PIN	CM030255x2450ooo98rk
CPx 40 205	4 kV	2 mA	10	24	1.5	200	PIN	CM040205x2450ooo98rk
CPx 60 135	6 kV	1.3 mA	15	18	5.1	200	PIN	CM060135x2450ooo98rk

Notes:
replacement characters: o – options, r – revision, k – customization, x – polarity (negative/positive)

Table 3 Configurations

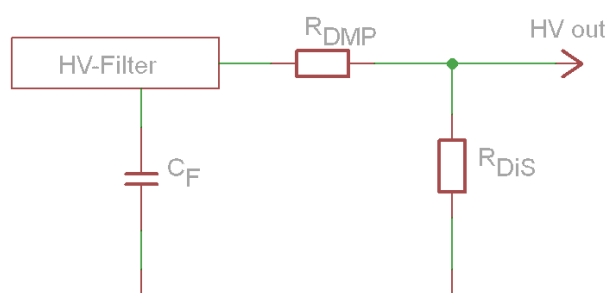


Figure 3

3.3. Options

ORDER INFO	INFO		EXAMPLE
POLARITY	Positive:	x = p	CP p 10 805
	Negative:	x = n	CP n 10 805

Table 4: Technical data: Options and order information

3.4. Functional description

CPS mini modules can be operated as constant voltage or constant current source, depending on the limiting set value (V_{SET} or I_{SET}). The specification for ripple and noise and stability is valid for constant voltage mode only.

Via PIN "INH" the voltage generation is switched on with ramp, but switched off without ramp. A monitor voltage for the output current and output voltage is available via the I_{MON} and V_{MON} connections.

The pin REF (reference) can be used for the V_{SET} voltage via an additional circuit (see Figure 4: VSET)

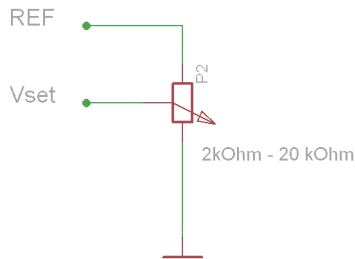


Figure 4: VSET

4. Dimensional drawings

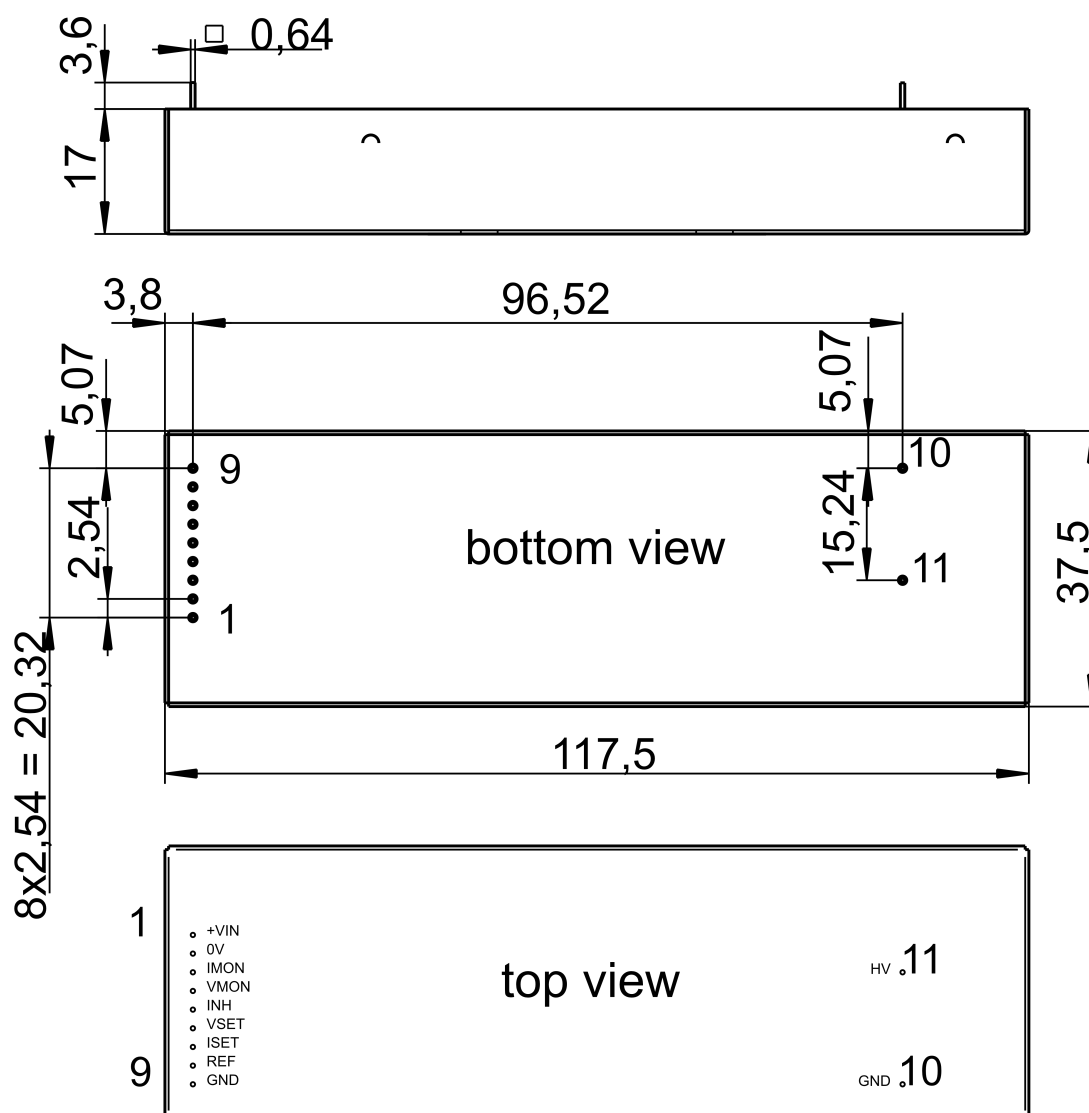
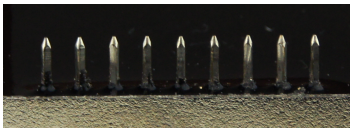



Figure 5: Dimensional drawings

5. Connectors and PIN assignments

CONNECTORS	PART NUMBERS (manufacturer code / iseg accessory parts item code)
98	CABLE SIDE
 Figure 6  Figure 7	part number none Mounting on printed circuit board, Grid dimensions 2.54mm manufacturer iseg part number

PIN	NAME	DESCRIPTION	VALUE
1	VIN	V _{in} Supply voltage	+24 V DC
2	0V ^{1,2}	Supply ground	
3	IMON	I _{mon} Monitor voltage of output current	0 ... 5 V
4	VMON	V _{mon} Monitor voltage	0 ... 5 V
5	INH	Inhibit, LOW = active, shut down the output voltage	TTL-level: LOW → V _{out} = 0V HIGH or n.c. → HV ON
6	VSET	V _{set} Set value of output voltage	0 ... 5 V
7	ISET	I _{set} Set voltage of output current	0 ... 5 V
8	REF	V _{ref} Internal reference voltage	5 V, I _{max} = 2.5 mA
9	GND ¹	Signal ground	
10	GND ¹	HV ground	
11	HV	V _{out} High voltage output	

Notes:
Case is connected to GND
¹⁾ internally connected
²⁾ electrically isolated from GND

Table 5: PIN Assignment

6. Order guides

CONFIGURATION ORDER GUIDE (item code parts)									
CM	030	255	P	24	50	000	98	0	0
Type	V _{nom}	I _{nom} (nA)	Polarity	Input Voltage	Monitor Voltage	Option	connector	Revision	Customized Version
CPS mini series	three significant digits • 100V For Example: 030 = 3000V	two significant digits + number of zeros For Example: 255 = 2,5 mA	P = positive N = negative	two significant digits 24 = 24 Volt	two significant digits 1.th hex • 1V 2.th dez • 0,1V 50 = 5 Volt		98 = PIN	one digit For Example: A = first revision B = second revision	one digit For Example: 0 = no customization

Table 6: Configuration item code

7. Appendix

For more information please use the following download links:

This document https://iseq-hv.com/download/DC_DC/CPS/iseq_datasheet_CPSmini_en.pdf
CPS Series https://iseq-hv.com/en/products/detail/CPS
Archives https://iseq-hv.com/download/?dir=DC_DC/CPS/archive

8. Glossary

SHORTCUT	MEANING
V_{nom}	nominal output voltage
V_{out}	output voltage
V_{set}	set value of output voltage
V_{mon}	monitor voltage of output voltage
V_{meas}	digital measured value of output voltage
V_{p-p}	peak to peak ripple voltage
V_{in}	input / supply voltage
V_{type}	type of output voltage (AC, DC)
V_{ref}	internal reference voltage
V_{max}	limit (max.) value of output voltage
V_{limit}	voltage limit
$\Delta V_{out} [\Delta V_{in}]$	deviation of V_{out} depending on variation of supply voltage
$\Delta V_{out} [\Delta R_{load}]$	deviation of V_{out} depending on variation of output load
V_{bounds}	Voltage bounds, a tolerance tube $V_{set} \pm V_{bounds}$ around V_{set} .
I_{nom}	nominal output current
I_{out}	output current
I_{set}	set value of output current
I_{mon}	monitor voltage of output current
I_{meas}	digital measured value of current
I_{trip}	current limit to shut down the output voltage
I_{in}	input / supply current
I_{max}	limit (max.) value of output current
I_{limit}	Current Limit.
I_{bounds}	Current bounds, a tolerance tube $I_{set} \pm I_{bounds}$ around I_{set} .
P_{nom}	nominal output power
P_{in}	input power
P_{in_nom}	nominal input power
T	temperature
T_{REF}	Reference temperature
ON	HV ON/OFF
/ON	HV OFF/ON
CH	channel(s)
HV	high voltage
LV	low voltage
GND	signal ground
INH	Inhibit
POL	Polarity
KILL	KillEnable

9. Warranty & Service

This device is made with high care and quality assurance methods. The standard factory warranty is 12 months. Please contact the iseg sales department if you wish to extend the warranty.

CAUTION



CAUTION!

Repair and maintenance may only be performed by trained and authorized personnel.

For repair please follow the RMA instructions on our website: www.iseg-hv.com/en/support/rma

10. Disposal

INFORMATION



INFORMATION

All high-voltage equipment and integrated components are largely made of recyclable materials. Do not dispose the device with regular residual waste. Please use the recycling and disposal facilities for electrical and electronic equipment available in your country.

11. Manufacturer contact

iseg Spezialelektronik GmbH

Bautzner Landstr. 23

01454 Radeberg / OT Rossendorf

GERMANY

FON: +49 351 26996-0 | FAX: +49 351 26996-21

www.iseg-hv.com | info@iseg-hv.de | sales@iseg-hv.de