

**Technical documentation**  
Last changed on: 28.02.2017

# EDS Series

Distributor High Voltage Module with Common Floating Ground

- 16 / 24 / 48 channel, 500 V – 3 kV versions
- Low cost version with reduced current measurement accuracy
- very low ripple and noise
- hardware voltage and current limit
- voltage control and current measurement per channel
- programmable parameters



## Document history

| Version | Date       | Major changes            |
|---------|------------|--------------------------|
| 2.0     | 28.02.2017 | Relayouted documentation |

## Disclaimer / Copyright

Copyright © 2017 by iseg Spezialelektronik GmbH / Germany. All Rights Reserved.

This document is under copyright of iseg Spezialelektronik GmbH, Germany. It is forbidden to copy, extract parts, duplicate for any kind of publication without a written permission of iseg Spezialelektronik GmbH. This information has been prepared for assisting operation and maintenance personnel to enable efficient use.

**The information in this manual is subject to change without notice. We take no responsibility for any mistake in the document. We reserve the right to make changes in the product design without reservation and without notification to the users. We decline all responsibility for damages and injuries caused by an improper use of the device.**

## Important security information

It is strongly recommended to read the operator´s manual before operation. To avoid injury of users it is not allowed to open the unit. There are no parts which can be maintained by users inside of the unit. Opening the unit will void the warranty.

We decline all responsibility for damages and injuries caused by an improper use of the module. It is strongly recommended to read the operators manual before operation.

### WARNING!



WARNING!

The non-observance of the advices marked as "Warning!" could lead to possible injury or death.

### ATTENTION!



ATTENTION!

Advices marked as "Attention!" describe actions to avoid possible damages to property.

### INFORMATION



INFORMATION

Advices marked as "Information" give important information.

# Table of Contents

|       |                                           |    |
|-------|-------------------------------------------|----|
|       | Document history.....                     | 2  |
|       | Disclaimer / Copyright.....               | 2  |
|       | Important security information.....       | 2  |
| 1     | General description.....                  | 4  |
| 2     | Technical data.....                       | 4  |
| 3     | Handling.....                             | 6  |
| 3.1   | Connection.....                           | 6  |
| 3.2   | Module status.....                        | 6  |
| 3.3   | Hardware Limit.....                       | 6  |
| 3.4   | Safety Loop.....                          | 6  |
| 3.5   | Delayed Trip.....                         | 7  |
| 3.5.1 | Operating principle.....                  | 7  |
| 4     | Options.....                              | 7  |
| 4.1   | SLA – Active safety loop.....             | 7  |
| 4.2   | SLP – Internally powered safety loop..... | 7  |
| 5     | Front panel versions.....                 | 8  |
| 6     | Dimensional Drawings.....                 | 8  |
| 7     | Connectors and PIN assignments.....       | 9  |
| 8     | Order guides.....                         | 10 |
| 9     | Appendix.....                             | 10 |
|       | Warranty & service.....                   | 10 |
| 10    | Manufacturer’s contact.....               | 11 |

# 1 General description

## WARNING!



WARNING!

The devices induce output voltages and currents which conformable to **EN61010-1** are not dangerous to life. But it is possible that they effect health damages to sensitive persons.

## ATTENTION!



ATTENTION!

The devices must only be used in combination with iseg approved crates.

EDS modules are cost effective distribution multichannel high voltage power supplies in MMS system (Eurocard format). The modules are available as Standard version and as Low Cost version with a reduced resolution and precision of the current measurement. EDS supplies come with common floating ground to reduce the voltage noise level. With up to 48 channels each single channel has an independent voltage control. The modules are made of high precision components such as 24 bit ADC and 20 bit DAC and provide comprehensive security features. By offering different configurations and options this module perfectly covers various types of applications such as detector supply, experimental setup or lab use.

# 2 Technical data

| SPECIFICATIONS                                                                                                                                        | EDS STANDARD                                               | EDS LOW COST                                         |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|------------------------------------------------------|
| Polarity                                                                                                                                              | Factory fixed, positive or negative                        |                                                      |
| Floating principle                                                                                                                                    | Common Floating Ground                                     |                                                      |
| Ripple and noise (f > 10 Hz)                                                                                                                          | < 5 mV <sub>p-p</sub>                                      |                                                      |
| Ripple and noise (f > 1 kHz)                                                                                                                          | < 2 mV <sub>p-p</sub>                                      |                                                      |
| Stability                                                                                                                                             |                                                            |                                                      |
| Stability [ΔV <sub>out</sub> vs. ΔV <sub>in</sub> ]                                                                                                   | < 1 • 10 <sup>-5</sup> V <sub>nom</sub>                    |                                                      |
| Stability - [ΔV <sub>out</sub> vs. ΔR <sub>load</sub> ]                                                                                               | < 5 • 10 <sup>-5</sup> V <sub>nom</sub>                    |                                                      |
| Long term stability (1h warmup) 24h                                                                                                                   | < 1 • 10 <sup>-5</sup> V <sub>nom</sub>                    |                                                      |
| Temperature coefficient - Voltage measurement                                                                                                         | < 20 ppm / K                                               |                                                      |
| Temperature coefficient - Current measurement                                                                                                         | < 100 ppm / K                                              |                                                      |
| Resolution - The resolution of measurable values depends on the settings of the sampling rate and the digital filter!                                 |                                                            |                                                      |
| Resolution voltage setting                                                                                                                            | 2 • 10 <sup>-6</sup> • V <sub>nom</sub>                    |                                                      |
| Resolution current setting                                                                                                                            | 1 • 10 <sup>-4</sup> • I <sub>nom</sub>                    |                                                      |
| Resolution voltage measurement                                                                                                                        | 2 • 10 <sup>-6</sup> • V <sub>nom</sub>                    |                                                      |
| Resolution current measurement                                                                                                                        | 1 • 10 <sup>-4</sup> • I <sub>nom</sub>                    | 5 • 10 <sup>-4</sup> • I <sub>nom</sub>              |
| Measurement accuracy - The measurement accuracy is guaranteed in the range 1% • V <sub>nom</sub> < V <sub>out</sub> < V <sub>nom</sub> and for 1 year |                                                            |                                                      |
| Accuracy voltage measurement                                                                                                                          | ± (0.01 % • V <sub>out</sub> + 0.02 % • V <sub>nom</sub> ) |                                                      |
| Accuracy current measurement                                                                                                                          | ± (0.1 % • I <sub>out</sub> + 0.1 % • I <sub>nom</sub> )   | ± (1 % • I <sub>out</sub> + 1 % • I <sub>nom</sub> ) |
| Sample rates ADC (SPS)                                                                                                                                | 5, 10, 25, 50, 60, 100, 500                                |                                                      |

|                         |                                                                     |
|-------------------------|---------------------------------------------------------------------|
| Digital filter averages | 1, 16, 64, 256, 512, 1024                                           |
| Voltage ramp up / down  | up to $0.2 \cdot V_{nom} / s$   opt. up to $0.75 \cdot V_{nom} / s$ |
| Hardware limits         | Potentiometer per module [ $V_{max}$ and $I_{max}$ ]                |
| Limit monitor voltage   | 2.5 V                                                               |
| Digital interface       | CAN (potential free)                                                |
| Protection              | Safety loop, overload and short circuit protected                   |
| HV connector            | R51   SHV   Radiall                                                 |
| System connector        | 96 PIN (MMS HV compatible, according to DIN 41612)                  |
| Safety loop connector   | Lemo 2pole                                                          |
| Limit monitor connector | Lemo 2pole                                                          |
| Case                    | 19" plug-in cassette                                                |
| Dimensions – L/W/H      | 220mm / 8HP / 6U                                                    |
| Operating temperature   | 0 – 40 °C                                                           |
| Storage temperature     | -20 -60 °C                                                          |
| Humidity                | 20 - 80 %, not condensing                                           |

Table 1: Technical data: Specifications EDS

| CONFIGURATIONS EDS SERIES |           |             |    |                          |                            |                     |          |
|---------------------------|-----------|-------------|----|--------------------------|----------------------------|---------------------|----------|
| Type                      | $V_{nom}$ | $I_{nom}$   | Ch | Max. $I_{in}$ (A) at 24V | HV connector Standard/opt. | Item code           | Options  |
| EDS Fy 05x                | 500 V     | 1 mA        | 16 | 0.8                      | <b>R51.46</b> ,SHV         | ED161005p1050004300 | SLA, SLP |
| EDS 18y 05x               | 500 V     | 1 mA        | 24 | 1.1                      | <b>R51.46</b>              | ED241005p1050004300 | SLA, SLP |
| EDS 30y 05x               | 500 V     | 1 mA        | 48 | 2.2                      | <b>R51.46</b>              | ED481005p1050004300 | SLA, SLP |
| EDS Fy 15x                | 1.5 kV    | 1 mA        | 16 | 1.7                      | <b>R51.46</b> ,SHV         | ED161015p1050004300 | SLA, SLP |
| EDS 18y 15x               | 1.5 kV    | 1 mA        | 24 | 2.6                      | <b>R51.46</b>              | ED241015p1050004300 | SLA, SLP |
| EDS 30y 15x               | 1.5 kV    | 1 mA        | 48 | 5.2                      | <b>R51.46</b>              | ED481015p1050004300 | SLA, SLP |
| EDS Fy 30x                | 3 kV      | 500 $\mu$ A | 16 | 1.7                      | <b>R51.46</b> ,SHV         | ED161030p5040004300 | SLA, SLP |
| EDS 18y 30x               | 3 kV      | 500 $\mu$ A | 24 | 2.6                      | <b>R51.46</b>              | ED241030p5040004300 | SLA, SLP |
| EDS 30y 30x               | 3 kV      | 500 $\mu$ A | 48 | 5.2                      | <b>R51.46</b>              | ED481030p5040004300 | SLA, SLP |

Table 2: Technical data: Configurations of EDS series

| OPTIONS                             | OPTION CODE                                    | EXAMPLE            | ITEM CODE HEX CODING |
|-------------------------------------|------------------------------------------------|--------------------|----------------------|
| <b>POLARITY</b>                     | Positive: <b>x = p</b> , negative <b>x = n</b> | EDS F1 05 <b>p</b> |                      |
| <b>LOW COST</b>                     | Standard: <b>y=1</b> , low cost: <b>y=3</b>    | EDS F3 05p         |                      |
| <b>ACTIVELY SAFETY LOOP</b>         | <b>SLA</b>                                     |                    | 001                  |
| <b>INTERNAL SOURCED SAFETY LOOP</b> | <b>SLP</b>                                     |                    | 002                  |

Table 3: Technical data: Options and order information

## 3 Handling

### 3.1 Connection

The supply voltages and the CAN interface are connected to the module via a 96-pin connector on the rear side of the module. The physical address of the module, determined by the slot position in the crate, is also accessible via this connector. Modules and crate controllers with different settings of bit rate do not work on the same CAN-Line.

| INFORMATION                                                                       |                                                                                                                                                                                                                                                                         |
|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <p>Note: For proper operation the module must be configured with the correct CAN bitrate, which meets the configuration of the crate controller, the module will be used with. The delivery condition is shown on the modules typeplate (side plate of the module).</p> |
| INFORMATION                                                                       | Typically newer iseg crate controllers (CC24, CC23, CC238) are delivered with 250kBits/s standard. Wiener M-POD Controller and older iseg hardware is set on 125 kBit/s standard bitrate.                                                                               |

### 3.2 Module status

The module status is displayed by two LEDs on the front panel

|                         |                                                                                                                                                                                                                                                                                                                                                                    |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| green LED „OK“ on       | all channels have the status “OK”                                                                                                                                                                                                                                                                                                                                  |
| green LED „OK“ off      | an error occurred: safety loop is possibly not closed or the power supplies are out of tolerance or the threshold of $V_{max}$ , $I_{max}$ , $I_{set}$ or $I_{trip}$ (see function descriptions for details) has been exceeded<br>LED will be switched off until the error has been fixed and the corresponding status bit has been erased via software interface. |
| yellow LED on           | one or more channels voltage on output is more than 56V                                                                                                                                                                                                                                                                                                            |
| Green LED blinking slow | prepares firmware update                                                                                                                                                                                                                                                                                                                                           |
| Green LED blinking fast | Firmware update is stored into flash, do not switch of power supply, crate etc.                                                                                                                                                                                                                                                                                    |

Table 4: Module status information

### 3.3 Hardware Limit

The maximum output voltage for all channels (hardware voltage limit) is defined by the position of the corresponding potentiometer  $V_{max}$ . The maximum output current for all channels (hardware current limit) is defined by the position of the corresponding potentiometer  $I_{max}$ . The highest possible set value for voltage and current is given by  $V_{max} - 2\%$  and  $I_{max} - 2\%$ , respectively. It is possible to measure the hardware voltage and current limits at the sockets below the potentiometer. The socket voltages are proportional to the relative limits, where 2.5 V corresponds to  $102 \pm 2\% V_{nom}$  and  $102 \pm 2\% I_{nom}$ . The output voltage and current are limited to the specified value. If a limit is reached or exceeded in any channel the green LED on the front panel turns off.

### 3.4 Safety Loop

A safety loop can be implemented by the safety loop socket (SL) on the front panel and between the SLcontacts (Pin 22 and PIN 30) at the REDEL-connector, if equipped. If the safety loop is active a high voltage generation in any channel is only possible if the safety loop is closed and an external current in a range of 5 to 20 mA of any polarity is driven through the loop. (For modules with a REDEL-connector the front panel SL input must be shortened.) If the safety loop is opened during the operation the output voltages will be shut off without ramp and the corresponding bits in the ModuleStatus and ModuleEventStatus are cancelled (see "CAN\_EDCP\_Programmers-Guide.pdf"). After closing the loop again the ModuleEventStatus has to be reset and the channels have to be switched ON. The loop connectors are potential free, the internal voltage drop is approx. 3 V. By factory setup the safety loop is not active (the corresponding bits are always set). The loop can be activated by removing the jumper "SL-disable" on the rear side of the module.

## 3.5 Delayed Trip

### 3.5.1 Operating principle

The function "*Delayed Trip*" provides a user-configurable, time-delayed response to an increased output current ( $I_{out}$ ) higher than the set current ( $I_{set}$ ). The response to this kind of event can be, for example, to ramp down the channel with the programmed ramp. A detailed description for the configuration can be found in the manual **CAN\_EDCP\_Programmers-Guide.pdf** (see **appendix**).

By a programmable timeout with one millisecond resolution, the trip can be delayed up to four seconds. If the measured current exceeds the set current the programmed timeout counter is decremented, keeping the output voltage. If the current returns to a value  $< I_{set}$  before timeout the counter will be reset. So this process can be restarted if the current rises again.

Note that the actual current is acquired approximately every 150ms, which can lead to delays in the detection of an exceeded or again reduced current.

If the current at any time exceeds the hardware current limit (about 30% above the current limit value set by the limit potentiometer) the channel will be shut off without delay and ramp.

If the *Delayed Trip* function is activated the voltage ramp should be limited to 1 % of  $V_{nom}$  before. Higher values could trigger a trip by internal charge balancing during a ramp, even though the output current does not exceed the set value  $I_{set}$ .

If the connected load contains capacities or if  $I_{set}$  is very small, it might be necessary to further reduce the ramp speed. Alternatively, the *Delayed Trip* can be activated only after the completion of the ramp.

#### INFORMATION



An activated KillEnable feature disables the Delayed Trip function.

#### INFORMATION

An active *KillEnable* function disables the *Delayed Trip* function. If *KillEnable* is active and a trip occurs, the channel is shut down without ramp. However, the actual discharge time strongly depends on the connected load.

## 4 Options

### 4.1 SLA – Active safety loop

Actively opens the Safety loop in case of a trip or a delayed trip. This option allows to shut down other modules and devices by interrupting the SL when a trip is detected.

### 4.2 SLP – Internally powered safety loop

Internal current source for the Safety Loop (no galvanic isolation of the SL and the crate GND).

## 5 Front panel versions

| FRONT PANELS |     |              |
|--------------|-----|--------------|
| Channels     | 16  | 16 / 24 / 48 |
| Floating     | CFG | CFG          |
| HV Connector | SHV | R51          |
| Figure       |     |              |

Table 6: Front panel versions

## 6 Dimensional Drawings

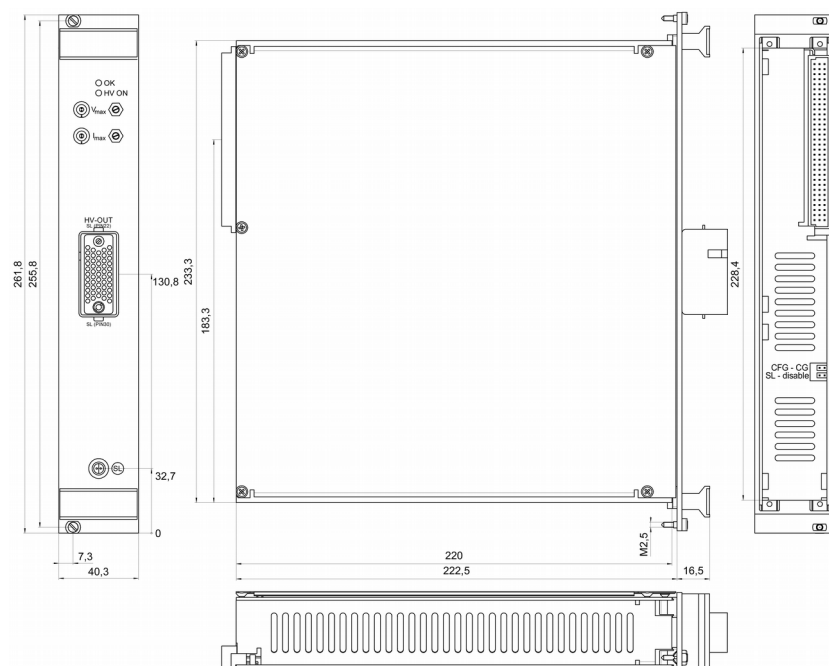


Figure 1: Dimensional Drawing (ex. R51)

## 7 Connectors and PIN assignments

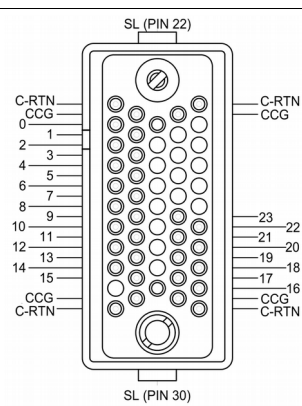
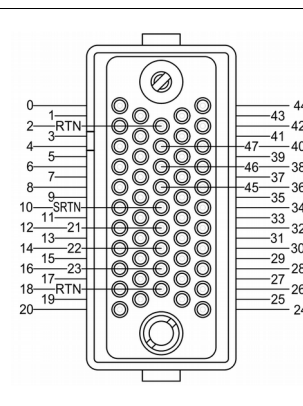
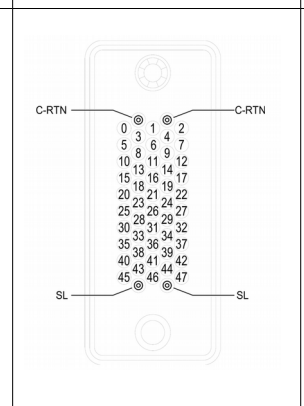
| HV CONNECTOR ASSIGNMENTS |                                                                                   |                                                                                   |                                                                                    |
|--------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
| Name                     | R51.44 (REDEL)                                                                    | R51.46 (REDEL)                                                                    | I52 (RADIAL) / SHV                                                                 |
| Figure                   |  |  |  |
| SAFETY LOOP              |                                                                                   | LIMIT MONITOR                                                                     |                                                                                    |
| Name                     | Safety Loop socket                                                                | Limit monitor socket 2pol                                                         |                                                                                    |
| Figure                   |  |  |                                                                                    |

Table 7: Connector and pin assignments

| CONNECTORS PART NUMBERS (manufacturer code / iseg accessory parts item code) |                           |                             |                           |
|------------------------------------------------------------------------------|---------------------------|-----------------------------|---------------------------|
| POWER SUPPLY SIDE                                                            |                           | CABLE SIDE                  |                           |
| R51 (REDEL 51 PINS)                                                          |                           |                             |                           |
| Socket                                                                       | SLG.H51.LLZG              | Connector                   | SAG.H51.LLZBG             |
| Socket contacts (male)                                                       | FFA.05.403.ZLA1 / Z592189 | Connector contacts (female) | ERA.05.403.ZLL1 / Z592263 |
| Contacts Saf. Loop (male)                                                    | FGG.2B.565.ZZC / Z592261  | Contacts Saf. Loop (female) | EGG.3B.665.ZZM / Z592262  |
|                                                                              |                           | Socket Load Side            | SLA.H51.LLZBG / Z201035   |
| I52 (RADIAL 52 PINS)                                                         |                           |                             |                           |
| Socket                                                                       | 691803004                 | Connector                   | 691802002                 |
| Socket Contacts                                                              | 691804200                 | Contacts                    | 691804300                 |
| Socket Contacts Safety Loop                                                  | 691804230                 | Connector contacts (SL)     | 691804300                 |
| SHV (ROSENBERGER)                                                            |                           |                             |                           |
| Socket                                                                       | 57S501-200N3              | Connector                   | 57K101-006N3 / Z590162    |
| Safety Loop (LEMO)                                                           |                           |                             |                           |
| Socket                                                                       | ERA.05.302.CLL            | Connector                   | FFA.05.302.CLAC / Z592312 |
| Limit monitor 2pol. (LEMO)                                                   |                           |                             |                           |
| Socket                                                                       | EGG.00.302.CLL            | Connector                   | FGG.00.302.CLAD           |

Table 8: Connectors part number information

## 8 Order guides

| CABLE ORDER GUIDE                                                              |            |                                              |                     |                                            |
|--------------------------------------------------------------------------------|------------|----------------------------------------------|---------------------|--------------------------------------------|
| POWER SUPPLY SIDE CONNECTOR                                                    | CABLE CODE | CABLE DESCRIPTION                            | LOAD SIDE CONNECTOR | ORDER CODE<br><i>LLL = length in m</i> (*) |
| R51.44-G                                                                       | 07         | HV cable 6kV Kerpen SL-v2YCeHI 37xAWG26/7red | R51.44-A            | R44G_C07-LLL_R44A                          |
| R51.46-G                                                                       | 08         | HV cable 6kV Kerpen SL-v2YCeHI 56xAWG26/7red | R51.46-A            | R46G_C07-LLL_R46A                          |
| SHV                                                                            | 04         | HV cable shielded 30kV (HTV-30S-22-2)        | open                | SHV_1C04-LLL                               |
| *) Length building examples: 10cm => 0.1, 2.5m => 2.5, 12m => 012, 999m => 999 |            |                                              |                     |                                            |

Table 9: Guideline for cable ordering

| CONFIGURATION ORDER GUIDE (item code parts) |                     |                                                                    |                                                               |                              |                                                                       |                                                                |                                                                                 |                    |
|---------------------------------------------|---------------------|--------------------------------------------------------------------|---------------------------------------------------------------|------------------------------|-----------------------------------------------------------------------|----------------------------------------------------------------|---------------------------------------------------------------------------------|--------------------|
| ED                                          | 48                  | 1                                                                  | 030                                                           | P                            | 504                                                                   | 000                                                            | 02                                                                              | 00                 |
| High Voltage, Distributor                   | Numbers of channels | Class                                                              | V <sub>nom</sub>                                              | Polarity                     | I <sub>nom</sub> (nA)                                                 | Option (hex)                                                   | HV-Connector                                                                    | Customized Version |
|                                             |                     | 1 = normal Current Measurement<br>3 = Low Cost Current Measurement | three significant digits *100V<br>For Example:<br>030 = 3000V | p = positive<br>n = negative | two significant digits + number of zeros<br>For Example:<br>305 = 3mA | Sum of the hex codes (s. table 3)<br>For Example:<br>SLP = 002 | 02 = SHV 5kV<br>44 and 46 = Redel Multipin (s. Table 4)<br>17 = Radial Multipin | 00 = none          |

Table 10: Item code parts for different configurations

## 9 Appendix

For more information please use the following download links:

|                                                                                                                                                                   |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>This document</b>                                                                                                                                              |
| <a href="http://download.iseg-hv.com/SYSTEMS/MMS/EDS/iseg_datasheet_EDS_en_2.0.pdf">http://download.iseg-hv.com/SYSTEMS/MMS/EDS/iseg_datasheet_EDS_en_2.0.pdf</a> |
| <b>CAN EDCP Programmers-Guide</b>                                                                                                                                 |
| <a href="http://download.iseg-hv.com/SYSTEMS/MMS/CAN_EDCP_Programmers-Guide.pdf">http://download.iseg-hv.com/SYSTEMS/MMS/CAN_EDCP_Programmers-Guide.pdf</a>       |
| <b>iseg Hardware Abstraction Layer</b>                                                                                                                            |
| <a href="http://download.iseg-hv.com/SYSTEMS/MMS/isegHardwareAbstractionLayer.pdf">http://download.iseg-hv.com/SYSTEMS/MMS/isegHardwareAbstractionLayer.pdf</a>   |

## Warranty & service

This device is made with high care and quality assurance methods. The factory warranty is up to 36 months, starting from date of issue (invoice). Within this period a 5 years warranty extension can be ordered at additional charge. Please contact iseg sales department.

### ATTENTION



Repair and maintenance may only be performed by trained and authorized personnel.

For repair please follow the RMA instructions on our website: [www.iseg-hv.com/en/support/rma](http://www.iseg-hv.com/en/support/rma)

## 10 Manufacturer's contact

**iseg Spezialelektronik GmbH**

Bautzner Landstr. 23

01454 Radeberg / OT Rossendorf

GERMANY

FON: +49 351 26996-0 | FAX: +49 351 26996-21

[www.iseg-hv.com](http://www.iseg-hv.com) | [info@iseg-hv.de](mailto:info@iseg-hv.de) | [sales@iseg-hv.de](mailto:sales@iseg-hv.de)